


Product Description	Technical Features	Operating Range	Material
<ul style="list-style-type: none"> ▶ 1,1-Seal face ▶ 1,2-O-Ring (For rotary seal) ▶ 1,3-Housing ▶ 1,4-Spring ▶ 1,5-Set screws ▶ 1,6-Drive collar ▶ 2-Stationary Seat ▶ 3-O-Ring 	<ul style="list-style-type: none"> ▶ Single Seal ▶ Unbalanced ▶ Independent of rotation direction 	<ul style="list-style-type: none"> ▶ $d_1 = 18 - 65\text{mm}$ ▶ $p = 10\text{ bar}$ ▶ $t = -20 / 220\text{ }^\circ\text{C}$ ▶ $V_g = 20\text{ m/sn}$ 	<ul style="list-style-type: none"> ▶ Rotary seal faces: Carbon, ▶ Stationary seal faces: Chrome Nickel Silicon carbide, Ceramic, Tungsten Carbide, ▶ Elastomers : Viton (FKM), EPDM,

Stationary Seat Alternatives

- ▶ G-4 G-9

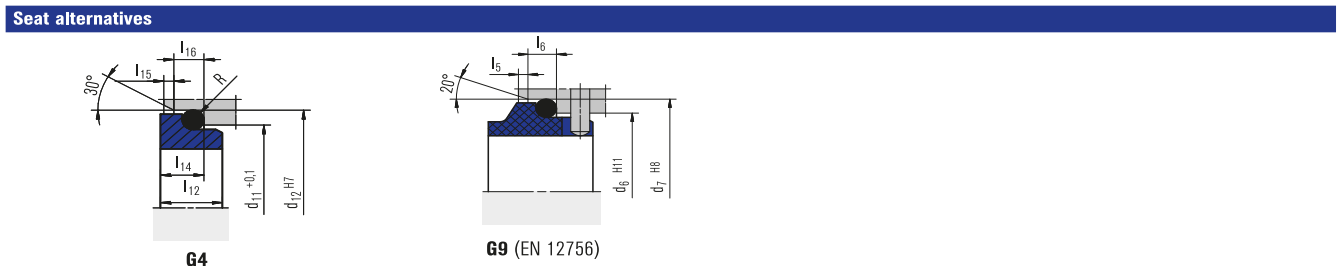

Dimensions in mm

d	D1	L	F	D2	D3	d	D1	L	F	D2	D3
18	36	43	6.0	24.0	30.0	40	62	55.3	7.5	52.2	58.0
20	38	43	6.0	29.5	35.0	42	64	62.3	7.5	53.3	62.0
22	40	43	6.0	29.5	35.0	45	67	62.3	8.0	55.3	64.0
24	42	43	6.0	32.0	38.0	48	69	65.3	8.0	59.7	68.4
25	43	43	6.0	32.0	38.0	50	72	69.3	8.0	60.8	69.3
28	46	45	7.0	36.0	42.0	55	77	70.3	8.0	66.5	75.4
30	48	47	7.0	39.2	45.0	58	80	72.3	8.0	69.5	78.4
32	50	49	7.5	42.2	48.0	60	82	74.3	8.0	71.5	80.4
35	53	49.5	7.5	46.2	52.0	65	90	76.3	9.0	76.5	85.4
38	59	55.3	7.5	49.2	55.0						